

11/15/00  
JC912 U.S. PTO

11-17 000

A

Attorney Docket No.: RESH-001

**IN THE UNITED STATES PATENT AND TRADEMARK OFFICE**

Patent Application

I hereby certify that this transmittal of the below described documents is being deposited with the United States Postal Service in an envelope bearing Express Mail Postage and an Express Mail label, with the below serial number, addressed to the Commissioner of Patents and Trademarks, Washington, D.C., 20231, on the below date of deposit.			
Express Mail Label No.:	EL648669816US	Name of Person Making the Deposit:	Jose Garcia
Date of Deposit:	11/15/00	Signature of the Person Making the Deposit:	<i>Jose Garcia</i>

JC490 U.S. PTO  
09/714722  
11/15/00

Inventor(s): Pete Dahl, Byron Dickinson, Margie Levine and Paul Rodman

Title: OPTIMIZATION OF ABUTTED-PIN HIERARCHICAL PHYSICAL DESIGN

The Commissioner of Patents and Trademarks  
Washington, D.C. 20231  
Sir:

Transmittal of a Patent Application  
(Under 37 CFR §1.53)

Transmitted herewith is the above identified patent application, including:

- ☒ Specification, claims and abstract, totaling 36 pages.
- ☐ Formal drawings, totaling \_\_\_\_\_ pages.
- ☒ Informal drawings, totaling 17 pages.
- ☒ Declaration and Power of Attorney.
- ☐ Information Disclosure statement.
- ☐ Form 1449
- ☐ Assignment(s)
- ☐ Assignment Recordation Form (duplicate)
- ☐ Preliminary Amendment

**FEES DUE**

The fees due for filing the specification pursuant to 37 C.F.R. § 1.16 and for recording of the Assignment, if any, are determined as follows:

CLAIMS					
	NO. OF CLAIMS		EXTRA CLAIMS	RATE	FEES
Basic Application Fee					\$710.00
Total Claims	1	Minus 20=	0	X \$18 =	\$0.00
Independent Claims	1	Minus 3=	0	X \$80=	\$0.00
If multiple dependent claims are presented, add \$260.00					
Add Assignment Recording Fee of \$40.00 If Assignment document is enclosed					
<b>TOTAL APPLICATION FEE DUE</b>					<b>\$710.00</b>

## PAYMENT OF FEES

The full fee due in connection with this communication is provided as follows:

1. Not enclosed
  - ☐ No filing fee is to be paid at this time.
2. Enclosed
  - ☐ Filing fee
  - ☐ Recording assignment
  - ☐ Petition fee for filing by other than all the inventors or person on behalf of the inventor where inventor refused to sign or cannot be reached
  - ☐ For processing an application with specification in a non-English language
  - ☐ Processing and retention fee
  - ☐ Fee for international-type search report
  - ☐ The Commissioner is hereby authorized to charge any additional fees associated with this communication or credit any overpayment to Deposit Account No.: 23-0085. A duplicate copy of this authorization is enclosed.
  - ☐ A check in the amount of \$710.00
  - ☒ **Charge any fees required or credit any overpayments associated with this filing to Deposit Account No.: 23-0085.**

This application is filed pursuant to 37 C.F.R. § 1.53 in the name of the above-identified Inventor(s).

Please direct all correspondence concerning the above-identified application to the following address:

**WAGNER, MURABITO & HAO LLP**  
Two North Market Street, Third Floor  
San Jose, California 95113  
(408) 938-9060

- ☒ This transmittal ends with this page.

Respectfully submitted,

Date: November 15, 2000

By: Jose S. Garcia  
Jose S. Garcia  
Reg. No. 43,628

United States Patent Application

For

OPTIMIZATION OF ABUTTED-PIN HIERARCHICAL PHYSICAL DESIGN

Inventors:

Pete Dahl

Byron Dickinson

Margie Levine

Paul Rodman

Prepared by:

WAGNER, MURABITO & HAO LLP

Two North Market Street

Third Floor

San Jose, California 95113

(408) 938-9060

**CONFIDENTIAL**

## OPTIMIZATION OF ABUTTED-PIN HIERARCHICAL PHYSICAL DESIGN

### 5 BACKGROUND OF THE INVENTION

#### FIELD OF THE INVENTION

The present invention generally relates to the field of integrated circuit design. More particularly, the present invention relates to the field of software tools for hierarchical physical design.

10

#### RELATED ART

The tremendous advances in technology have been fueled by improvements in integrated circuit design. In particular, integrated circuits have become smaller and more complex. Integrated circuit design engineers depend on electronic design automation (EDA) software tools to facilitate the design of integrated circuits.

15

Typically, the integrated circuit design process begins with a specification which describes the functionality of the integrated circuit and may include a variety of constraints. Then, during a logic design phase, the logical implementation of the integrated circuit is determined. Several operations are performed to obtain a logical representation of the integrated circuit. Generally, EDA software tools use register transfer logic (RTL) to represent the integrated circuit. However, additional EDA software tools may be used.

20

After completing the logic design phase, the integrated circuit undergoes a physical design phase. Typically, the output of the logic design phase is a netlist, which is then used in the physical design phase. Here, EDA software tools layout the integrated circuit to obtain a representation of the physical components in the integrated circuit, whereas the representation indicates the manner in which the integrated circuit will be implemented on a semiconductor chip. A variety of operations are performed on the layout of the integrated circuit.

At the end of the physical design phase, the representation of the semiconductor chip (in which the integrated circuit is implemented) is sent to a semiconductor manufacturing plant.

Typically, in the physical design phase, EDA software tools implement a flat physical design. For example, the components (standard cells, macrocells, etc.) of the integrated circuit are placed during a placement operation and are routed during a routing operation. However, as the integrated circuit becomes more complex, the EDA software tools struggle to perform the placement operation and the routing operation. In particular, the performance of the EDA software tools degrades since the EDA software tools have to manipulate very large files during the placement operation and the routing operation. Moreover, as the complexity of the integrated circuit increases, the time necessary to complete the physical design phase increases significantly.

Traditional hierarchical physical design has emerged as an alternative to the flat physical design. Figure 1 illustrates the traditional hierarchical physical design 100. Here, the components of the integrated circuit are partitioned into a plurality of blocks 10-30. Each block 10-30 includes a plurality of pins 50, whereas each pin 50 represents a location where a signal can enter the block 10-30 or a location where a signal can exit the block 10-30. As illustrated in Figure 1, the traditional hierarchical physical design 100 includes a channel 40. The channel 40 provides space in order to connect the pins 50 of the blocks 10-30 to one another via metal (not shown) or any other wiring material. The traditional hierarchical physical design 100 enables the placement operation and the routing operation (as well as other operations) for the blocks 10-30 to be performed in parallel with EDA software tools, reducing the time period of the physical design phase. Moreover, the performance of the EDA software tools is improved because the file for each block 10-30 is much smaller than the file for the entire integrated circuit of the flat physical design. More importantly, the EDA software tools are better suited to optimize each block 10-30 than to optimize the entire integrated circuit of the flat physical design. However, the traditional hierarchical physical design 100 generates wasted space in the channel 40 and generates wiring problems in the channel 40, such as congestion and crosstalk. Moreover, the traditional hierarchical physical design 100 places and routes components at a top-level (shown in Figure 1) and a block-level (within each block 10-30), causing inefficiencies and causing problems with EDA software tools which are configured to operate with flat physical designs.

## SUMMARY OF THE INVENTION

An abutted-pin hierarchical physical design process is described. The abutted-pin hierarchical physical design provides solutions to the problems of the traditional hierarchical physical design and provides additional advantages and benefits. In

5 particular, the abutted-pin hierarchical physical design does not have channels.

Moreover, in the abutted-pin hierarchical physical design, components of the top-level are merged into the block-level so that the top-level netlist is reduced significantly.

10 In the integrated circuit design flow according to an embodiment of the present invention, the physical design phase receives the netlist from the logic design phase.

In addition, the physical design phase receives physical design information, whereas the physical design information can be any information about a prior integrated circuit that has undergone the physical design phase. In an embodiment, the physical design information is stored in a database.

15 In an embodiment of the present invention, the integrated circuit design flow of the present invention is utilized to optimize pin assignment. In an embodiment of the present invention, excess pins formed along a boundary between two blocks are removed.

20 In an embodiment of the present invention, a software tool that performs a “press” operation preserves the properties associated with a segment of a top-level

shape despite the shape operation (e.g., AND) being performed with the block and the top-level shape to obtain the segment.

- 5        If the top-level object has the press property, the top-level object retains its location when the top-level object is “pressed” into a block. If the top-level object does not have the press property, the top-level object generally does not retain its location when the top-level object is “pressed” into the block.

- 10       If in the top-level netlist, the instantiation of a block includes a port that is unused, (thus, not needed for the top-level routing for pin assignment), a software tool removes the port from the top-level netlist, but the block-level netlist of the block remains unchanged.

- 15       Some software tools are not able to represent the relationship that more than one port is coupled to a pin. Hence, a software tool removes one of the ports from the netlist based on some criteria, such as whether a port is an input port or an output port.

- 20       If in the top-level netlist, the instantiation of the block includes a port that is tied to either the power line (1) or the ground line (0) rather to a port of another block, a software tool removes the port from the top-level netlist to avoid routing the port at the top-level. Moreover, the software tool ties the port to either the power line (1) or the ground line (0) in the block-level netlist of the block.



In an embodiment, a software tool performs an unwinding operation which adds to the block-level netlist--of bonding pad blocks--the ports (which were removed earlier by the software tool) that couple to the top-level inputs and to the top-level outputs.

Thus, the netlist modified by the physical design phase (e.g., repeater and buffers are added to the netlist) can be compared with the netlist originally received from the logic design phase. In particular, formal verification, layout versus schematic (LVS) verification, and design rules check (DRC) verification can be performed by software tools.

In an embodiment, each block-level netlist is partitioned into a first netlist and a second netlist. The second netlist and its associated extraction file of each block and the top-level netlist and its associated extraction file are utilized by software tools to perform the timing analysis. This timing analysis can be performed significantly faster than the case where the block-level netlist is not partitioned into the first netlist and the second netlist. In an embodiment, the timing graph resulting from the timing analysis can be analyzed to extract timing constraints (relating to the delay that can be generated by a block) for each block. Hence, if a block is optimized to meet its extracted timing constraints, the block is more likely to meet its timing parameter when the block interacts with the other blocks in the integrated circuit.

These and other advantages of the present invention will no doubt become apparent to those of ordinary skill in the art after having read the following detailed description of the preferred embodiments which are illustrated in the drawing figures.

RESH-001/ACM/JSG

## BRIEF DESCRIPTION OF THE DRAWINGS

The accompanying drawings, which are incorporated in and form a part of this specification, illustrate embodiments of the invention and, together with the description, serve to explain the principles of the present invention.

5

Figure 1 illustrates the traditional hierarchical physical design 100.

Figure 2 illustrates an exemplary computer system 200 on which embodiments of the present invention may be practiced.

10

Figure 3 illustrates an integrated circuit 300 generated with software tools according to an embodiment of the abutted-pin hierarchical physical design process of the present invention.

15

Figure 4 illustrates the abutted-pin hierarchical physical design process 400 according to an embodiment of the present invention.

20

Figure 5 illustrates the abutted-pin hierarchical physical design process 500 as performed at the block-level in a particular block (450A-450C of Figure 4) after step 440 of Figure 4.

Figure 6 illustrates the layout of the blocks 10-30 is established.

Figure 7 illustrates a clock wire 320 and a power wire 310 of the top-level.

Figure 8 illustrates a top-level route for obtaining the pin assignments for each block 10-30.

5

Figure 9A illustrates the integrated circuit design flow of the prior art.

Figure 9B illustrates the integrated circuit design flow according to an embodiment of the present invention.

10

Figure 10A illustrates an integrated circuit 300 based on the abutted-pin hierarchical physical design process of the present invention and using the integrated circuit design flow of the prior art (Figure 9A), showing the top-level routing for pin assignment.

15

Figure 10B illustrates the integrated circuit 300 of Figure 10A at the block level.

Figure 10C illustrates the integrated circuit 300 of Figure 10B at the block-level.

20

Figure 11A illustrates an integrated circuit 300 based on the abutted-pin hierarchical physical design process of the present invention and using the integrated circuit design flow of the present invention (Figure 9B), showing the top-level routing for pin assignment.

Figure 11B illustrates the integrated circuit 300 of Figure 11A at the block-level.

Figure 11C illustrates the integrated circuit 300 of Figure 11B at the block-level.

5

Figure 12A illustrates an integrated circuit 300 based on the abutted-pin hierarchical physical design process of the present invention, showing the top-level routing for pin assignment.

Figure 12B illustrates the integrated circuit 300 of Figure 12A at the block-level.

Figure 12C illustrates the integrated circuit 300 of Figure 12B, showing the removal of excess pins.

Figure 13A illustrates an integrated circuit 300 based on the abutted-pin hierarchical physical design process of the present invention, showing the top-level routing for a top-level object 30 (e.g., routing metal).

Figure 13B illustrates the segment 30A of Figure 13A.

20

Figure 13C illustrates the integrated circuit 300 of Figure 13A in the top-level, showing that the segment 30A has been removed from the top-level netlist and merged into the block-level netlist of block1 10.

5           Figure 14A illustrates an integrated circuit 300 based on the abutted-pin hierarchical physical design process of the present invention, showing the top-level routing for a top-level object 60 (e.g., routing metal).

Figure 14B illustrates the integrated circuit 300 at the block-level.

10

Figure 14C illustrates the integrated circuit 300 at the block-level.

10  
11  
12  
13  
14  
15  
16  
17  
18  
19  
20  
21  
22  
23  
24  
25  
26  
27  
28  
29  
30  
31  
32  
33  
34  
35  
36  
37  
38  
39  
40  
41  
42  
43  
44  
45  
46  
47  
48  
49  
50  
51  
52  
53  
54  
55  
56  
57  
58  
59  
60  
61  
62  
63  
64  
65  
66  
67  
68  
69  
70  
71  
72  
73  
74  
75  
76  
77  
78  
79  
80  
81  
82  
83  
84  
85  
86  
87  
88  
89  
90  
91  
92  
93  
94  
95  
96  
97  
98  
99  
100  
101  
102  
103  
104  
105  
106  
107  
108  
109  
110  
111  
112  
113  
114  
115  
116  
117  
118  
119  
120  
121  
122  
123  
124  
125  
126  
127  
128  
129  
130  
131  
132  
133  
134  
135  
136  
137  
138  
139  
140  
141  
142  
143  
144  
145  
146  
147  
148  
149  
150  
151  
152  
153  
154  
155  
156  
157  
158  
159  
160  
161  
162  
163  
164  
165  
166  
167  
168  
169  
170  
171  
172  
173  
174  
175  
176  
177  
178  
179  
180  
181  
182  
183  
184  
185  
186  
187  
188  
189  
190  
191  
192  
193  
194  
195  
196  
197  
198  
199  
200  
201  
202  
203  
204  
205  
206  
207  
208  
209  
210  
211  
212  
213  
214  
215  
216  
217  
218  
219  
220  
221  
222  
223  
224  
225  
226  
227  
228  
229  
230  
231  
232  
233  
234  
235  
236  
237  
238  
239  
240  
241  
242  
243  
244  
245  
246  
247  
248  
249  
250  
251  
252  
253  
254  
255  
256  
257  
258  
259  
260  
261  
262  
263  
264  
265  
266  
267  
268  
269  
270  
271  
272  
273  
274  
275  
276  
277  
278  
279  
280  
281  
282  
283  
284  
285  
286  
287  
288  
289  
290  
291  
292  
293  
294  
295  
296  
297  
298  
299  
300  
301  
302  
303  
304  
305  
306  
307  
308  
309  
310  
311  
312  
313  
314  
315  
316  
317  
318  
319  
320  
321  
322  
323  
324  
325  
326  
327  
328  
329  
330  
331  
332  
333  
334  
335  
336  
337  
338  
339  
340  
341  
342  
343  
344  
345  
346  
347  
348  
349  
350  
351  
352  
353  
354  
355  
356  
357  
358  
359  
360  
361  
362  
363  
364  
365  
366  
367  
368  
369  
370  
371  
372  
373  
374  
375  
376  
377  
378  
379  
380  
381  
382  
383  
384  
385  
386  
387  
388  
389  
390  
391  
392  
393  
394  
395  
396  
397  
398  
399  
400  
401  
402  
403  
404  
405  
406  
407  
408  
409  
410  
411  
412  
413  
414  
415  
416  
417  
418  
419  
420  
421  
422  
423  
424  
425  
426  
427  
428  
429  
430  
431  
432  
433  
434  
435  
436  
437  
438  
439  
440  
441  
442  
443  
444  
445  
446  
447  
448  
449  
450  
451  
452  
453  
454  
455  
456  
457  
458  
459  
460  
461  
462  
463  
464  
465  
466  
467  
468  
469  
470  
471  
472  
473  
474  
475  
476  
477  
478  
479  
480  
481  
482  
483  
484  
485  
486  
487  
488  
489  
490  
491  
492  
493  
494  
495  
496  
497  
498  
499  
500  
501  
502  
503  
504  
505  
506  
507  
508  
509  
510  
511  
512  
513  
514  
515  
516  
517  
518  
519  
520  
521  
522  
523  
524  
525  
526  
527  
528  
529  
530  
531  
532  
533  
534  
535  
536  
537  
538  
539  
540  
541  
542  
543  
544  
545  
546  
547  
548  
549  
550  
551  
552  
553  
554  
555  
556  
557  
558  
559  
560  
561  
562  
563  
564  
565  
566  
567  
568  
569  
570  
571  
572  
573  
574  
575  
576  
577  
578  
579  
580  
581  
582  
583  
584  
585  
586  
587  
588  
589  
590  
591  
592  
593  
594  
595  
596  
597  
598  
599  
600  
601  
602  
603  
604  
605  
606  
607  
608  
609  
610  
611  
612  
613  
614  
615  
616  
617  
618  
619  
620  
621  
622  
623  
624  
625  
626  
627  
628  
629  
630  
631  
632  
633  
634  
635  
636  
637  
638  
639  
640  
641  
642  
643  
644  
645  
646  
647  
648  
649  
650  
651  
652  
653  
654  
655  
656  
657  
658  
659  
660  
661  
662  
663  
664  
665  
666  
667  
668  
669  
670  
671  
672  
673  
674  
675  
676  
677  
678  
679  
680  
681  
682  
683  
684  
685  
686  
687  
688  
689  
690  
691  
692  
693  
694  
695  
696  
697  
698  
699  
700  
701  
702  
703  
704  
705  
706  
707  
708  
709  
710  
711  
712  
713  
714  
715  
716  
717  
718  
719  
720  
721  
722  
723  
724  
725  
726  
727  
728  
729  
730  
731  
732  
733  
734  
735  
736  
737  
738  
739  
740  
741  
742  
743  
744  
745  
746  
747  
748  
749  
750  
751  
752  
753  
754  
755  
756  
757  
758  
759  
760  
761  
762  
763  
764  
765  
766  
767  
768  
769  
770  
771  
772  
773  
774  
775  
776  
777  
778  
779  
780  
781  
782  
783  
784  
785  
786  
787  
788  
789  
790  
791  
792  
793  
794  
795  
796  
797  
798  
799  
800  
801  
802  
803  
804  
805  
806  
807  
808  
809  
810  
811  
812  
813  
814  
815  
816  
817  
818  
819  
820  
821  
822  
823  
824  
825  
826  
827  
828  
829  
830  
831  
832  
833  
834  
835  
836  
837  
838  
839  
840  
841  
842  
843  
844  
845  
846  
847  
848  
849  
850  
851  
852  
853  
854  
855  
856  
857  
858  
859  
860  
861  
862  
863  
864  
865  
866  
867  
868  
869  
870  
871  
872  
873  
874  
875  
876  
877  
878  
879  
880  
881  
882  
883  
884  
885  
886  
887  
888  
889  
890  
891  
892  
893  
894  
895  
896  
897  
898  
899  
900  
901  
902  
903  
904  
905  
906  
907  
908  
909  
910  
911  
912  
913  
914  
915  
916  
917  
918  
919  
920  
921  
922  
923  
924  
925  
926  
927  
928  
929  
930  
931  
932  
933  
934  
935  
936  
937  
938  
939  
940  
941  
942  
943  
944  
945  
946  
947  
948  
949  
950  
951  
952  
953  
954  
955  
956  
957  
958  
959  
960  
961  
962  
963  
964  
965  
966  
967  
968  
969  
970  
971  
972  
973  
974  
975  
976  
977  
978  
979  
980  
981  
982  
983  
984  
985  
986  
987  
988  
989  
990  
991  
992  
993  
994  
995  
996  
997  
998  
999  
1000

Figure 15A illustrates an integrated circuit 300 based on the abutted-pin hierarchical physical design process of the present invention, showing the top-level routing for pin assignment.

Figure 15B illustrates that the port F of block1 10 has been removed from the top-level netlist.

20           Figure 16A illustrates an integrated circuit 300 based on the abutted-pin hierarchical physical design process of the present invention, showing the top-level routing for pin assignment.

Figure 16B illustrates that the port B of block1 10 has been removed from the netlist for the top-level routing for pin assignment.

Figure 17A illustrates an integrated circuit 300 based on the abutted-pin  
5 hierarchical physical design process of the present invention, showing the top-level routing for pin assignment.

Figure 17B illustrates that the port F of block1 10 has been removed from the top-level netlist.

10

The drawings referred to in this description should not be understood as being drawn to scale except if specifically noted.

## DETAILED DESCRIPTION OF THE INVENTION

Reference will now be made in detail to the preferred embodiments of the present invention, examples of which are illustrated in the accompanying drawings. While the invention will be described in conjunction with the preferred embodiments, it will be understood that they are not intended to limit the invention to these 5 embodiments. On the contrary, the invention is intended to cover alternatives, modifications and equivalents, which may be included within the spirit and scope of the invention as defined by the appended claims. Furthermore, in the following detailed description of the present invention, numerous specific details are set forth in order to provide a thorough understanding of the present invention. However, it will be 10 recognized by one of ordinary skill in the art that the present invention may be practiced without these specific details. In other instances, well known methods, procedures, components, and circuits have not been described in detail as not to unnecessarily obscure aspects of the present invention.

## NOTATION AND NOMENCLATURE

Some portions of the detailed descriptions which follow are presented in terms of procedures, logic blocks, processing, and other symbolic representations of operations on data bits within a computer memory. These descriptions and 15 representations are the means used by those skilled in the data processing arts to most effectively convey the substance of their work to others skilled in the art. In the present application, a procedure, logic block, process, etc., is conceived to be a self-consistent sequence of steps or instructions leading to a desired result. The steps are 20



those requiring physical manipulations of physical quantities. Usually, though not necessarily, these quantities take the form of electrical or magnetic signals capable of being stored, transferred, combined, compared, and otherwise manipulated in a computer system. It has proved convenient at times, principally for reasons of common  
5 usage, to refer to these signals as bits, values, elements, symbols, characters, terms, numbers, or the like.

It should be borne in mind, however, that all of these and similar terms are to be associated with the appropriate physical quantities and are merely convenient labels  
10 applied to these quantities. Unless specifically stated otherwise as apparent from the following discussions, it is appreciated that throughout the present invention, a variety of terms are discussed that refer to the actions and processes of an electronic system or a computer system, or other electronic computing device/system. The computer system or similar electronic computing device manipulates and transforms data  
15 represented as physical (electronic) quantities within the computer system's registers and memories into other data similarly represented as physical quantities within the computer system memories or registers or other such information storage, transmission, or display devices. The present invention is also well suited to the use of other computer systems such as, for example, optical, mechanical, or quantum  
20 computers.

## EXEMPLARY COMPUTER SYSTEM ENVIRONMENT

Aspects of the present invention are discussed in terms of steps executed on a computer system. Although a variety of different computer systems can be used

5 with the present invention, an exemplary computer system 200 is shown in Figure 2.

With reference to Figure 2, portions of the present invention are comprised of computer-readable and computer executable instructions which reside, for example, in computer-usable media of an electronic system such as the exemplary computer  
10 system. Figure 2 illustrates an exemplary computer system 200 on which embodiments of the present invention may be practiced. It is appreciated that the computer system 200 of Figure 2 is exemplary only and that the present invention can operate within a number of different computer systems including general-purpose computer systems and embedded computer systems.

15 Computer system 200 includes an address/data bus 100 for communicating information, a central processor 101 coupled with bus 100 for processing information and instructions, a volatile memory 102 (e.g., random access memory RAM) coupled with the bus 110 for storing information and instructions for the central processor 101  
20 and a non-volatile memory 103 (e.g., read only memory ROM) coupled with the bus 110 for storing static information and instructions for the processor 101. Exemplary computer system 200 also includes a data storage device 104 ("disk subsystem") such as a magnetic or optical disk and disk drive coupled with the bus 110 for storing

information and instructions. Data storage device 104 can include one or more removable magnetic or optical storage media (e.g., diskettes, tapes) which are computer readable memories. Memory units of computer system 200 include volatile memory 102, non-volatile memory 103 and data storage device 104.

5

Exemplary computer system 200 can further include an optional signal generating device 108 (e.g., a network interface card "NIC") coupled to the bus 110 for interfacing with other computer systems. Also included in exemplary computer system 200 of Figure 2 is an optional alphanumeric input device 106 including alphanumeric and function keys coupled to the bus 110 for communicating information and command selections to the central processor 101. Exemplary computer system 200 also includes an optional cursor control or directing device 107 coupled to the bus 110 for communicating user input information and command selections to the central processor 101. An optional display device 105 can also be coupled to the bus 110 for displaying information to the computer user. Display device 105 may be a liquid crystal device, other flat panel display, cathode ray tube, or other display device suitable for creating graphic images and alphanumeric characters recognizable to the user. Cursor control device 107 allows the user to dynamically signal the two-dimensional movement of a visible symbol (cursor) on a display screen of display device 105. Many implementations of cursor control device 107 are known in the art including a trackball, mouse, touch pad, joystick or special keys on alphanumeric input device 106 capable of signaling movement of a given direction or manner of displacement. Alternatively, it will be appreciated that a cursor can be directed and/or

activated via input from alphanumeric input device 106 using special keys and key sequence commands.

### ABUTTED-PIN HIERARCHICAL PHYSICAL DESIGN

5           Figure 3 illustrates an integrated circuit 300 generated with software tools according to the abutted-pin hierarchical physical design process of the present invention. The abutted-pin hierarchical physical design provides solutions to the problems of the traditional hierarchical physical design (see Figure 1) and provides additional advantages and benefits. In particular, the abutted-pin hierarchical physical  
10 design does not have channels. Moreover, in the abutted-pin hierarchical physical design, components of the top-level are merged into the block-level so that the top-level netlist is reduced to instantiations of each block 10-30 and 60-94.

As illustrated in Figure 3, the abutted-pin hierarchical physical design 300  
15 includes a plurality of blocks 10-30 and 60-94. The netlist of the integrated circuit 300 is partitioned into the plurality of blocks 10-30 and 60-94 such that each block 10-30 and 60-94 has a block level netlist. Blocks 10-30 have the major or core components of the integrated circuit 300. Blocks 60-94 have the bonding pads and other support circuitry of the integrated circuit 300. The blocks 10-30 and 60-94 can be rectangular  
20 in shape and can be rectilinear in shape. It should be understood that the integrated circuit 300 can have any number of blocks.

Each block 10-30 and 60-94 has one or more pins 50, whereas each pin 50 represents a location where a signal can enter the block 10-30 and 60-94 or a location where a signal can exit the block 10-30 and 60-94. The edge or boundary of each block 10-30 and 60-94 rests against the edge or boundary of another block 10-30 and 60-94, such that the pin 50 of one block abuts the pin of another block.

Moreover, the top-level components or objects (e.g., timing components, clock distribution wiring, power distribution wiring, repeaters, buffers, etc.) are not visible because they have been merged into the blocks 10-30 and 60-94 by a “press” operation performed by a software tool. First, the top-level objects (e.g., timing components, clock distribution wiring, power distribution wiring, repeaters, buffers, etc.) are placed and routed at the top-level (the top-level is shown in Figure 3). In the “press” operation, the top-level objects (e.g., timing components, clock distribution wiring, power distribution wiring, repeaters, buffers, etc.) that are within the boundary of a block 10-30 and 60-94 are removed from the top-level netlist and merged into the block-level netlist of that block 10-30 and 60-94. Hence, the abutted-pin hierarchical physical design 300 can be optimized by separately optimizing the individual blocks 10-30 and 60-94. Thus, the software tools can generate (e.g., perform placement, routing, timing, verification, etc.) and optimize the individual blocks 10-30 and 60-94 in parallel. Moreover, a bug within an individual block 10-30 and 60-94 can be corrected by returning that individual block to the logic design phase, while the other blocks continue to undergo the physical design phase.

Figure 4 illustrates the abutted-pin hierarchical physical design process 400 according to an embodiment of the present invention. At 410, a software tool receives the netlist of the integrated circuit from the logic design phase, as described above. The netlist is partitioned into a plurality of blocks, each block having a block-level netlist. In an embodiment, the partitioning of the netlist focuses on reducing the number of ports or terminals of a block that need to couple to the ports or terminals of other blocks.

At 420, a software tool performs top-level floor planning. Here, the layout of each block is determined. At the end of the top-level floor planning, the top-level for an integrated circuit 300 (as shown in Figure 6) is generated. As illustrated in Figure 6, the layout of the blocks 10-30 is established. In Figure 6, the bonding pads 60-94 (of Figure 3) have been omitted.

At 430, software tools perform top-level placement and routing for the top-level objects (e.g., timing components, clock distribution wiring, power distribution wiring, repeaters, buffers, etc.). Figure 7 illustrates a clock wire 320 and a power wire 310 of the top-level. The clock wire 320 is routed over BlockA 10 and BlockC 30. The power wire 310 is routed over BlockA 10. It should be understood that any number of additional top-level objects can be placed and routed at the top-level.

At 440, a software tool performs a top-level route for obtaining the pin assignments for each block 10-30, as illustrated in Figure 8. Since each block 10-30

has one or more ports or terminals 47 that needs to couple to a port or terminal of another block 10-30, the pins for each block 10-30 have to be defined. Initially, the ports 47 of each block 10-30 are placed in a general random location within each block at the top-level since the actual location of the port 47 is not known until a placement operation is performed at the block-level. As illustrated in Figure 8, the location 45A-45F where a routing wire 48 crosses a boundary between two blocks is defined as a pin for each of the blocks 10-30, facilitating creation of pins that are abutted. In an embodiment, a software tool creates each pin to have a width that is equivalent to the width of the routing wire 48 at the boundary between the two blocks.

The pins 50 are illustrated in Figure 3.

At 450A-450C, the abutted-pin hierarchical physical design process 400 enables software tools to generate and to optimize each block 10-30 in parallel at the block-level.

Figure 5 illustrates the abutted-pin hierarchical physical design process 500 as performed at the block-level in a particular block (450A-450C of Figure 4) after step 440 of Figure 4.

At 510, a software tool performs press operations. The top-level objects illustrated in Figure 7 (e.g., a clock wire 320 and a power wire 310) and which are located within the boundary of a particular block, are pressed into the particular block. In particular, the top-level objects that are within the boundary of a particular block are

removed from the top-level netlist and merged into the block-level netlist of that particular block. Moreover, the pins for the particular block are generated based on the location where the routing wire crosses the boundary between two blocks, as illustrated in Figure 8 and Figure 3.

5

At 510, a software tool performs block-level floor planning for the particular block. At 530, a software tool performs a block-level placement operation for the particular block. At 540, software tools perform a variety of block-level operations to optimize the particular block. Additionally, at 540, a block-level route is performed for the particular block by a software tool. At 552 and 554, software tools perform a block-level extraction operation for determining capacitance and resistance at the nodes and perform block-level timing analysis operations for the particular block.

At 560 and 570, a variety of software tools perform a number of verification operations such as formal verification, layout versus schematic (LVS) verification, and design rules check (DRC) verification.

Figure 9A illustrates the integrated circuit design flow of the prior art. As illustrated in Figure 9A, the physical design phase 910 receives the netlist from the logic design phase (not shown). The physical design phase 910 generates the physical design for the integrated circuit and outputs a GDS II file. The GDS II file is received by the semiconductor factory 920. The integrated circuit is fabricated by the semiconductor factory 920 on a semiconductor chip.



Figure 9B illustrates the integrated circuit design flow according to an embodiment of the present invention. As illustrated in Figure 9A, the physical design phase 910 receives the netlist from the logic design phase (not shown). In addition, the physical design phase 910 receives physical design information 930, whereas the physical design information 930 can be any information about a prior integrated circuit that has undergone the physical design phase 910. In an embodiment, the physical design information 930 is stored in a database. For example, the physical design information 930 can be pin assignments of the prior integrated circuit, optimal clock distribution tree of the prior integrated circuit, parasitic extraction data of the prior integrated circuit, locations of obstructions such as a RAM of the prior integrated circuit, identification of congested blocks of the prior integrated circuit, metal resources for the blocks of the prior integrated circuit, or any other information which can facilitate optimizing the current integrated circuit. Thus, the software tools of the physical design phase 910 can customize the current integrated circuit to avoid the problems of the prior integrated circuit and to realize the benefits of the prior integrated circuit.

In the physical design phase 910, decisions made at the top-level with respect to the top-level objects, significantly influence the creation of problems at the block-level and the optimization operations at the block-level. By using physical design information 930 (concerning the block-level of the prior integrated circuit) at the top-level of the current integrated circuit, the decisions made at the top-level with respect to the top-level objects of the current integrated circuit will be able to reduce the

problems present in the prior integrated circuit and will be able to generate solutions to overcome the problems present in the prior integrated circuit, improving the optimization of the abutted-pin hierarchical physical design process of the present invention. Thus, if the physical design information 930 has information about several prior integrated circuits, the current integrated circuit is more likely to be optimized.

In addition, the physical design phase 910 generates the physical design for the integrated circuit and outputs a GDS II file. Moreover, the physical design phase 910 stores physical design information 930 of the current integrated circuit to be used in the physical design phase 910 of a future integrated circuit. The GDS II file is received by the semiconductor factory 920. The integrated circuit is fabricated by the semiconductor factory 920 on a semiconductor chip.

Figure 10A illustrates an integrated circuit 300 based on the abutted-pin hierarchical physical design process of the present invention and using the integrated circuit design flow of the prior art (Figure 9A), showing the top-level routing for pin assignment. The port C of block1 10 is routed to port B of block2 20. The port A of block1 10 is routed to port D of block2 20. This top-level routing has been performed after ports A-D where placed in a generally random location within each block 10-20 at the top-level since the actual locations of the ports A-D are not known until a placement operation is performed at the block-level. Here, the software tools at the top-level do not have access to the physical design information of a prior integrated

circuit. The locations 15 and 16 are where the routing metal 18 crosses the boundary between two blocks 10 and 20.

Figure 10B illustrates the integrated circuit 300 of Figure 10A. At the block-level, the pins 15A and 16A were formed for block1 10. At the block-level, the pins 15B and 16B were formed for block2 20, whereas pin 15A abuts pin 15B and pin 16A abuts pin 16B. The pins 15A and 15B were formed at location 15 of Figure 10A. The pins 16A and 16B were formed at location 16 of Figure 10A.

Figure 10C illustrates the integrated circuit 300 of Figure 10B at the block-level. As illustrated in Figure 10C, the block-level placement operation for block1 10 placed the ports A and C at locations that are different from the locations used to generate the pin assignments in Figure 10A. In addition, the block-level placement operation for block2 20 placed the ports B and D at locations that are different from the locations used to generate the pin assignments in Figure 10A. Hence, the block-level routing operations for blocks 10 and 20 generated an inefficient amount of routing wire 19 to couple the ports to the pins in each block. In sum, the pin assignment affects the optimization of the routing wire 19.

Figure 11A illustrates an integrated circuit 300 based on the abutted-pin hierarchical physical design process of the present invention and using the integrated circuit design flow of the present invention (Figure 9B), showing the top-level routing for pin assignment. The port C of block1 10 is routed to port B of block2 20. The port A

of block1 10 is routed to port D of block2 20. This top-level routing has been performed after each port A-D where placed in a particular location within each block 10-20 at the top-level, whereas the particular location was based on using the physical design information associated with the prior integrated circuit (Figures 10A-10C).

- 5 Here, the software tools at the top-level have access to the physical design information of the prior integrated circuit (Figures 10A-10C). The locations 15 and 16 are where the routing metal 18 crosses the boundary between two blocks 10 and 20.

Figure 11B illustrates the integrated circuit 300 of Figure 11A at the block-level.

- 10 At the block-level, the pins 15A and 16A were formed for block1 10. At the block-level, the pins 15B and 16B were formed for block2 20, whereas pin 15A abuts pin 15B and pin 16A abuts pin 16B. The pins 15A and 15B were formed at location 15 of Figure 11A. The pins 16A and 16B were formed at location 16 of Figure 11A. Here, the pins 15A and 15A are associated with ports A and D, unlike Figure 10B where pins 15A and 15B were associated with ports C and B. Moreover, the pins 16A and 16A of Figure 11B are associated with ports C and B, unlike Figure 10B where pins 16A and 16B were associated with ports A and D.

Figure 11C illustrates the integrated circuit 300 of Figure 11B at the block-level.

- 20 As illustrated in Figure 11C, the block-level placement operation for block1 10 placed the ports A and C at locations that are different from the locations used to generate the pin assignments in Figure 11A. In addition, the block-level placement operation for block2 20 placed the ports B and D at locations that are different from the locations

used to generate the pin assignments in Figure 11A. However, the difference in the location of the ports between Figure 11A and Figure 11C is less than the difference in the location of the ports between Figure 10A and Figure 10C. Hence, the block-level routing operations for blocks 10 and 20 generated a more efficient amount of routing wire 19 to couple the ports to the pins in each block, compared to Figure 10C. In sum, the pin assignments generated with the use of the physical design information of the prior integrated circuit (Figures 10A-10C) were more optimal than the pin assignments generated without the use of the physical design information of the prior integrated circuit (Figures 10A-10C).

Figure 12A illustrates an integrated circuit 300 based on the abutted-pin hierarchical physical design process of the present invention, showing the top-level routing for pin assignment. In the course of routing source port 24 of block3 30 to destination port 22 of block2 20, the software tool that performs the top-level routing for pin assignment crosses the boundary between block1 10 and block2 20 at locations 15,16, and 17, whereas the locations 15,16, and 17 will be defined as pins. The software tool is concerned with routing a path between the source port 24 and the destination port 22, but is not concerned about the number of times the path crosses the boundary between the same blocks.

Figure 12B illustrates the integrated circuit 300 of Figure 12A at the block-level. The pins 15A-15B, 16A-16B, and 17A-17B are formed between block1 10 and block2 20. The pins 18A-18B are formed between block1 10 and block3 30. The presence of

pins 16A-16B and 17A-17B causes additional routing metal to be added to block1 10 and block2 20 so that pins 15A, 16A, and 17A can be coupled within block1 10 and so that pins 15B, 16B, and 17B can be coupled within block2 20. Hence, one pair of pins (15A-15B or 16A-16B or 17A-17B) is sufficient.

5

Figure 12C illustrates the integrated circuit 300 of Figure 12B, showing the removal of excess pins. As illustrated in Figure 12C, excess pins 16A-16B and 17A-17B were removed from block1 10 and block2 20. This removal is based on a plurality criteria, such as the current flow direction between the source port 24 and the destination port 22, the location of the excess pins relative to the source port 24 and the destination port 22, or any other criteria. Here, the criteria kept pins 15A-15B but deleted pins 16A-16B and 17A-17B.

Figure 13A illustrates an integrated circuit 300 based on the abutted-pin hierarchical physical design process of the present invention, showing the top-level routing for a top-level object 30 (e.g., routing metal). As described above, a software tool performs a press operation so that the portion of the top-level object 30 which is within the boundary of a particular block 10-20 is moved from the top-level netlist to the block-level netlist of the particular block 10-20. In particular, the segment 30A is pressed into block1 10 while the segment 30B is pressed into block2 20. In an embodiment, the shape operations of a database are utilized in performing the press operation. In Figure 13A, an AND operation would be performed with block1 10 and the shape 30 to obtain the segment 30A (Figure 13B). Typically, the routing metal 30

includes a plurality of properties that are stored in a database. These properties identify the routing metal 30 and describe the function of the routing metal 30. However, in the shape operations (e.g., AND) of the prior art, the shape operation returns the segment 30A (Figure 13B) without its properties. Thus, these properties  
5 have to be reconstructed.

In the present invention, the software tool that performs the press operation preserves the properties associated with segment 30A of the routing metal 30 despite the shape operation (e.g., AND) performed with block1 10 and the shape 30 to obtain  
10 the segment 30A (Figure 13B).

Figure 13C illustrates the integrated circuit 300 of Figure 13A in the top-level, showing that the segment 30A has been removed from the top-level netlist and merged into the block-level netlist of block1 10. Moreover, the properties associated  
15 with segment 30A at the top-level are transferred to the segment 30A at the block-level.

Figure 14A illustrates an integrated circuit 300 based on the abutted-pin hierarchical physical design process of the present invention, showing the top-level  
20 routing for a top-level object 60 (e.g., routing metal). As illustrated in Figure 14A, the top-level object 60 is routed through block1 10, block2 20, and block3 30. The locations 51-52 indicate top-level object 60 crosses a boundary between two blocks. In an embodiment, a press property is added to the properties of the top-level object

60 stored in a database. If the top-level object 60 has the press property, the top-level object 60 retains its location when the top-level object 60 is pressed into block1 10, block2 20, and block3 30, as illustrated in the block-level view of the integrated circuit 300 in Figure 14C. If the top-level object 60 does not have the press property, the top-level object 60 generally does not retain its location when the top-level object 60 is pressed into block1 10, block2 20, and block3 30, as illustrated in the block-level view of the integrated circuit 300 in Figure 14B. For example, top-level objects such as power and ground have the press property. As illustrated in Figure 14B, the pins 51A-51B and 52A-52B are defined. However, the software tool is not constrained to placing the top-level object 60 in the block-level exactly as it was placed at the top-level. Moreover, the top-level object is placed in the block-level of block1 10, block2 20, and block3 30 according to the separate placement and routing requirements of block1 10, block2 20, and block3 30.

Figure 15A illustrates an integrated circuit 300 based on the abutted-pin hierarchical physical design process of the present invention, showing the top-level routing for pin assignment. As illustrated in Figure 15A, in the top-level netlist, the instantiation of block1 10 includes a port F that is unused, thus, not needed for the top-level routing for pin assignment. Hence, a software tool removes port F from the top-level netlist, but the block-level netlist of block1 10 remains unchanged. In an embodiment, the software tool that performs the press operation removes the port F. Figure 15B illustrates that the port F of block1 10 has been removed from the top-level netlist.



Figure 16A illustrates an integrated circuit 300 based on the abutted-pin hierarchical physical design process of the present invention, showing the top-level routing for pin assignment. As illustrated in Figure 16A, port F and port B of block1 10 are coupled to port C of block2 20 with a routing metal 40. However, at location 30 the routing metal 40 crosses the boundary between block1 10 and block2 20. If a pin is formed within block1 10 at location 30, the pin would be coupled to port F and to port B. However, some software tools are not able to represent this relationship (i.e., more than one port coupled to a pin). Hence, a software tool removes one of the ports (port F or port B) from the netlist based on some criteria, such as whether a port is an input port or an output port. Figure 16B illustrates that the port B of block1 10 has been removed from the netlist for the top-level routing for pin assignment.

Figure 17A illustrates an integrated circuit 300 based on the abutted-pin hierarchical physical design process of the present invention, showing the top-level routing for pin assignment. As illustrated in Figure 17A, in the top-level netlist, the instantiation of block1 10 includes a port F that is tied to either the power line (1) or the ground line (0) rather to a port of another block. Hence, a software tool removes port F from the top-level netlist to avoid routing the port F at the top-level. Moreover, the software tool ties the port F to either power line (1) or the ground line (0) in the block-level netlist of block1 10. Figure 17B illustrates that the port F of block1 10 has been removed from the top-level netlist.

As illustrated in Figure 3, the integrated circuit 300 based on the abutted-pin hierarchical physical design process of the present invention includes a North bond pad block 60, an East bond pad block 70, a South bond pad block 80, and a West bond pad block 90, each having bond pad cells. The top-level netlist of the integrated circuit 300 includes one or more top-level inputs for receiving external signals and one or more top-level outputs for transmitting signal off the chip. The top-level inputs and the top-level outputs are coupled to bond pad cells. Typically, software tools which perform a routing operation are configured to not perform the routing operation if the netlist includes bond pad cells. Since the North bond pad block 60, the East bond pad block 70, the South bond pad block 80, and the West bond pad block 90 have bond pad cells in the block-level netlist, the software tools refuse to perform the routing operation in these blocks, preventing pins to be formed on the boundary between these blocks and the blocks 10-30 (the core blocks).

In the present invention, the bond pad cells are marked as macrocells rather than bond pad cells, allowing pins to be formed on the boundary between these blocks and the blocks 10-30 (the core blocks).

Typically, the block-level netlist of the North bond pad block 60, the East bond pad block 70, the South bond pad block 80, and the West bond pad block 90 include nets to the top-level inputs and nets to the top-level outputs. Generally, the block-level netlist of the North bond pad block 60, the East bond pad block 70, the South bond pad block 80, and the West bond pad block 90 include nets to the bond pad cells.

In an embodiment of the present invention, a software tool removes the nets to the top-level inputs and nets to the top-level outputs so that the physical design of the integrated circuit can be accomplished as described above. In an embodiment, the software tool removes in the block-level netlist the ports that couple to the top-level inputs and to the top-level outputs. Moreover, the software tool adds a property to the nets to the bond pad cells to indicate that these nets are suppose to couple to the top-level inputs and to the top-level outputs, facilitating an unwinding operation to re-establish at the block-level netlist the nets to the top-level inputs and nets to the top-level outputs that were removed earlier. The unwinding operation adds to the block-level netlist the ports (which were removed earlier) that couple to the top-level inputs and to the top-level outputs. Thus, the netlist modified by the physical design phase (e.g., repeater and buffers are added to the netlist) can be compared with the netlist originally received from the logic design phase. In particular, formal verification, layout versus schematic (LVS) verification, and design rules check (DRC) verification can be performed by software tools.

A challenge with implementing an integrated circuit based on the abutted-pin hierarchical physical design process of the present invention involves analyzing the timing of signal paths that traverse more than one block. The timing of these global paths is difficult to analyzed compared to analyzing the timing of local paths, whereas local paths are signal paths that do not leave a block. One method of analyzing the timing of these global paths involves partitioning the block-level netlist of each block

into a first netlist and a second netlist. The first netlist includes nets which start at a register (or flip-flop) and end at a register (or flip-flop) within the block, whereas each branch of the net also starts at a register (or flip-flop) and ends at a register (or flip-flop) within the block. The second netlist includes nets which are coupled to a pin of the block. Generally, the first netlist is 3/4 of the initial block-level netlist while the second netlist is 1/4 of the initial block-level netlist. If the second netlist ratio is greater than 1/4, this indicates inefficient partitioning of the blocks.

Once the first netlist and the second netlist are obtain, an extraction operation to obtain parasitic resistance and capacitance is performed on the second netlist of each block. In an embodiment, the partitioning of the block-level netlist and the extraction operation in each block are performed in parallel. Moreover, an extraction operation is performed on the top-level netlist. In an embodiment, a software tool replaces the abutted pins of the top-level netlist with zero ohm resistors.

Some software tools utilized to perform the timing analysis are unable to operate on netlists having nets that are coupled to multiple pins of a block. In an embodiment of the present invention, these netlist are transformed by using "assign statements" to assign different names to the nets that are coupled to multiple pins of a block. Hence, each different named net can be coupled to a separate pin of the block.

In an embodiment, the second netlist and its associated extraction file of each block and the top-level netlist and its associated extraction file are utilized by software

tools to perform the timing analysis. This timing analysis can be performed significantly faster than the case where the block-level netlist is not partitioned into the first netlist and the second netlist. In an embodiment, the timing graph resulting from the timing analysis can be analyzed to extract timing constraints (relating to the delay that can be generated by a block) for each block. Hence, if a block is optimized to meet its extracted timing constraints, the block is more likely to meet its timing parameter when the block interacts with the other blocks in the integrated circuit.

The foregoing descriptions of specific embodiments of the present invention have been presented for purposes of illustration and description. They are not intended to be exhaustive or to limit the invention to the precise forms disclosed, and obviously many modifications and variations are possible in light of the above teaching. The embodiments were chosen and described in order to best explain the principles of the invention and its practical application, to thereby enable others skilled in the art to best utilize the invention and various embodiments with various modifications as are suited to the particular use contemplated. It is intended that the scope of the invention be defined by the Claims appended hereto and their equivalents.

## CLAIMS

What is Claimed is:

- 5            1.        A method of improving a physical design of a current integrated circuit, comprising the steps of:
- a)        receiving a netlist of said current integrated circuit;
  - b)        receiving physical design information from a prior integrated circuit; and
  - c)        generating said physical design based on said netlist and said physical
- 10        design information.

## OPTIMIZATION OF ABUTTED-PIN HIERARCHICAL PHYSICAL DESIGN

### ABSTRACT OF THE INVENTION

An abutted-pin hierarchical physical design process is described. The abutted-pin hierarchical physical design provides solutions to the problems of the traditional hierarchical physical design and provides additional advantages and benefits. In particular, the abutted-pin hierarchical physical design does not have channels. Moreover, in the abutted-pin hierarchical physical design, components of the top-level are merged into the block-level so that the top-level netlist is reduced significantly.

10

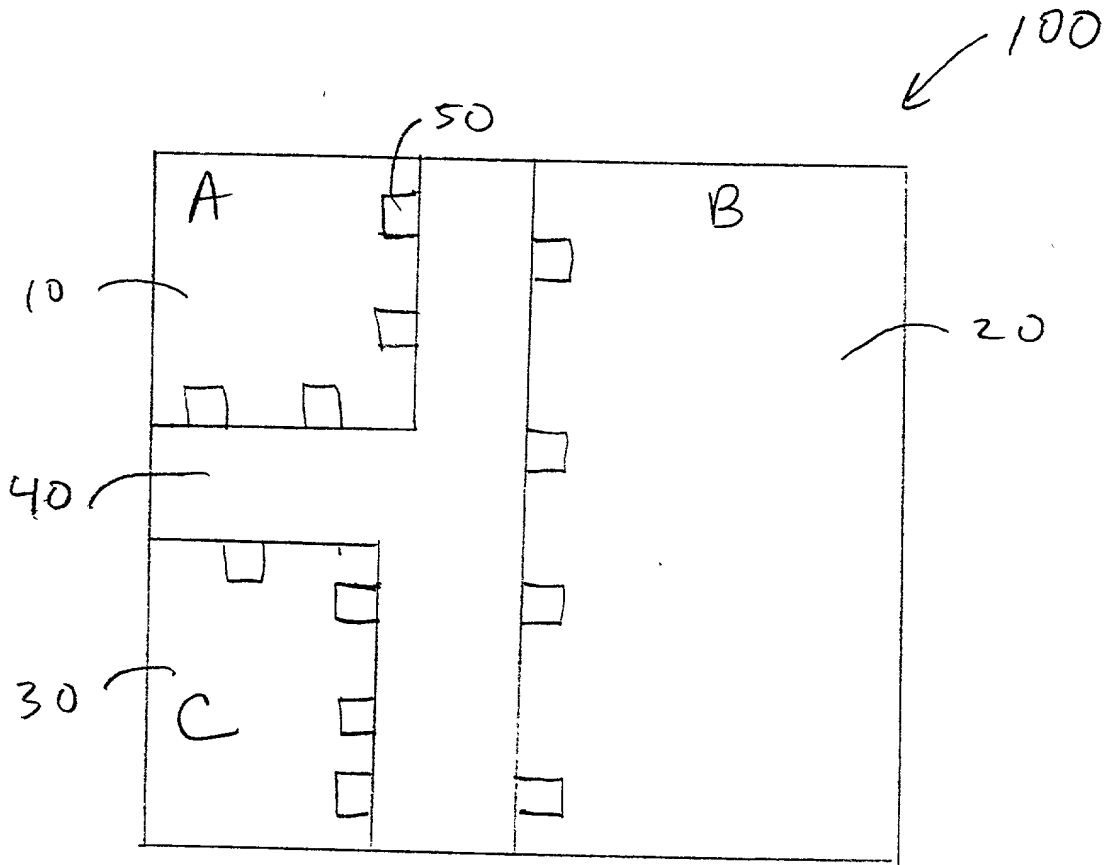


Figure 1



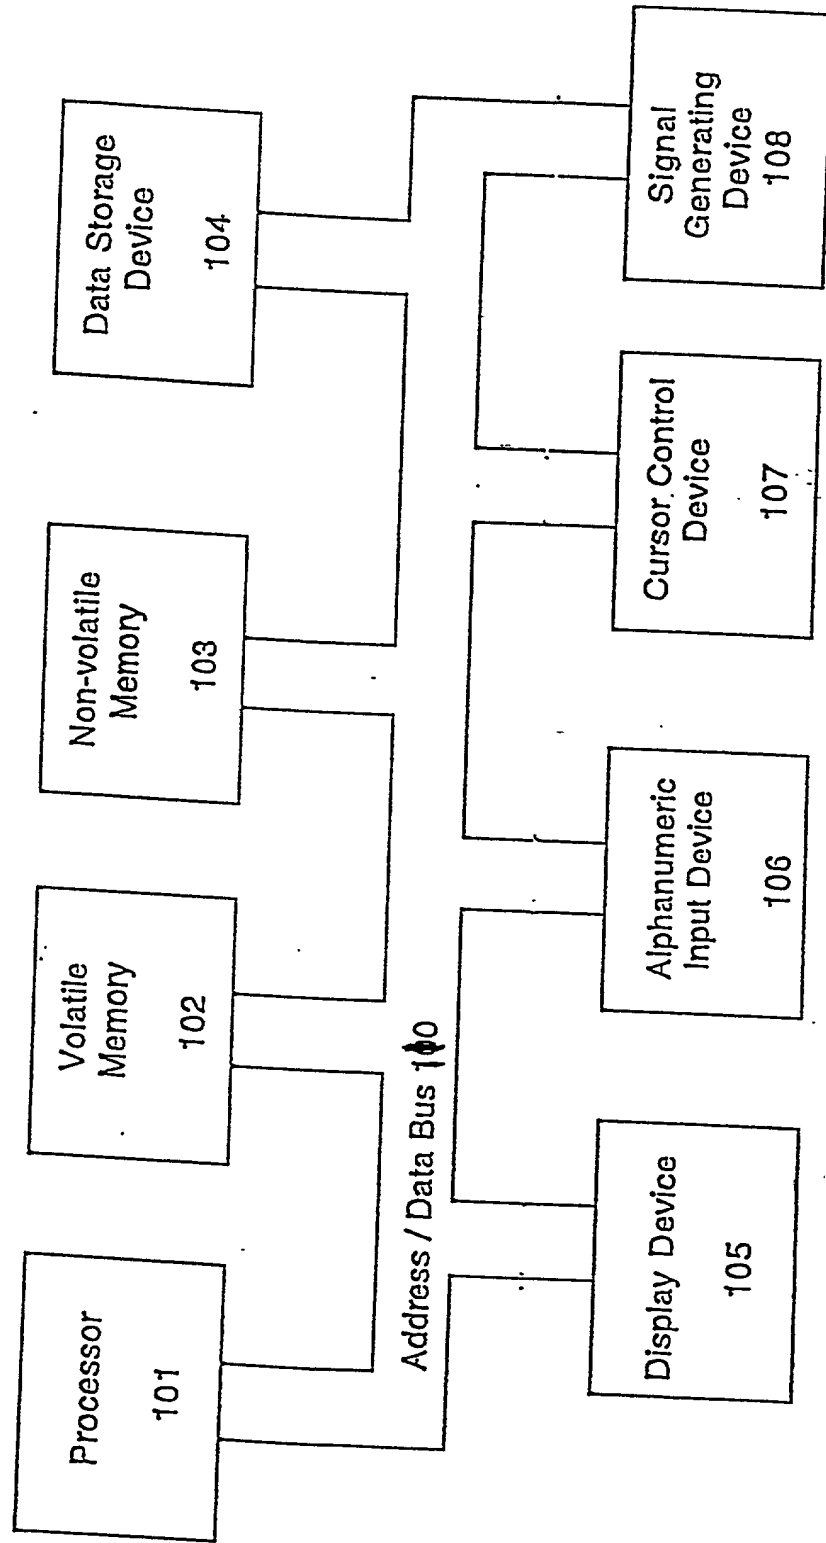


Figure 2



300  
↙


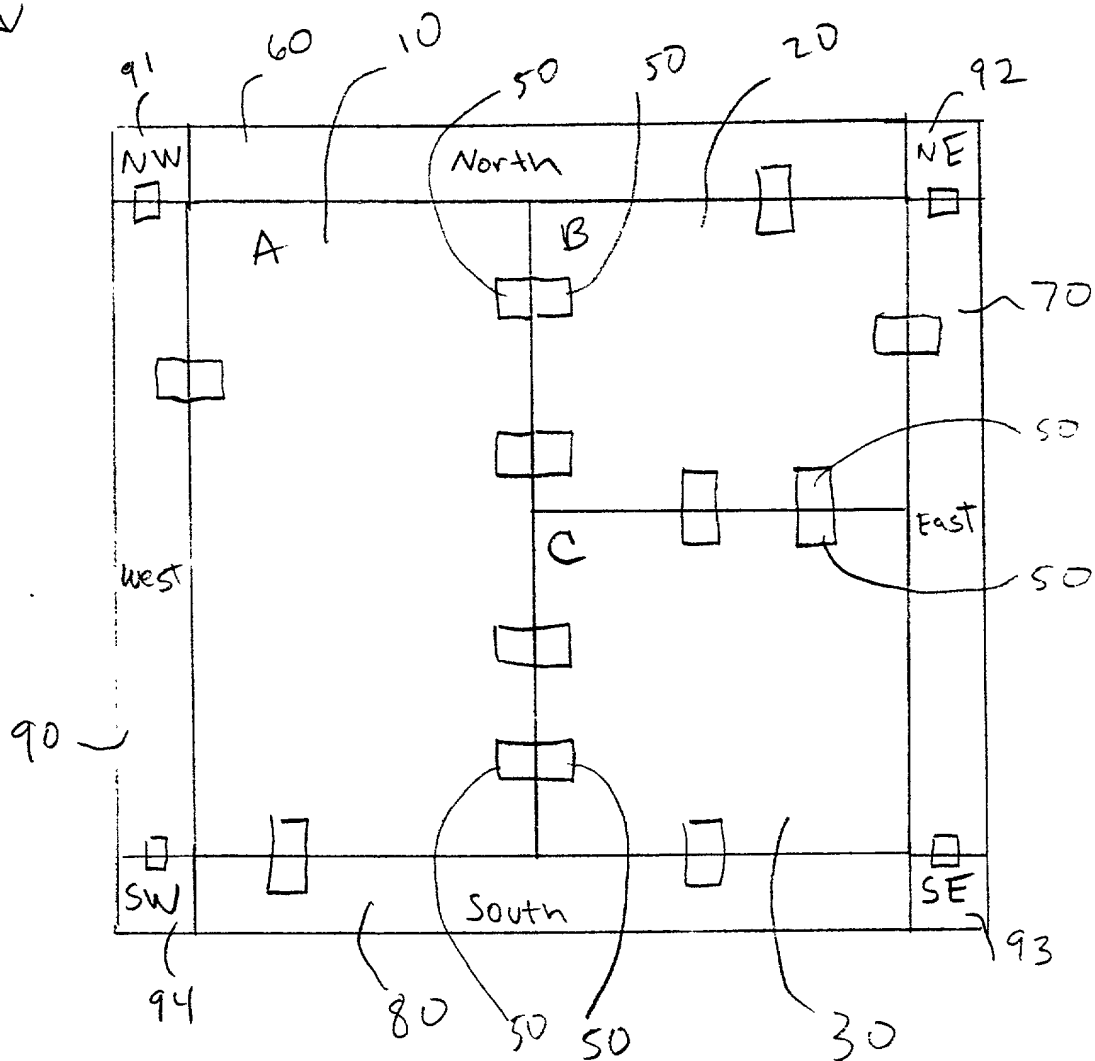


Figure 3

400 ↓

Figure 4

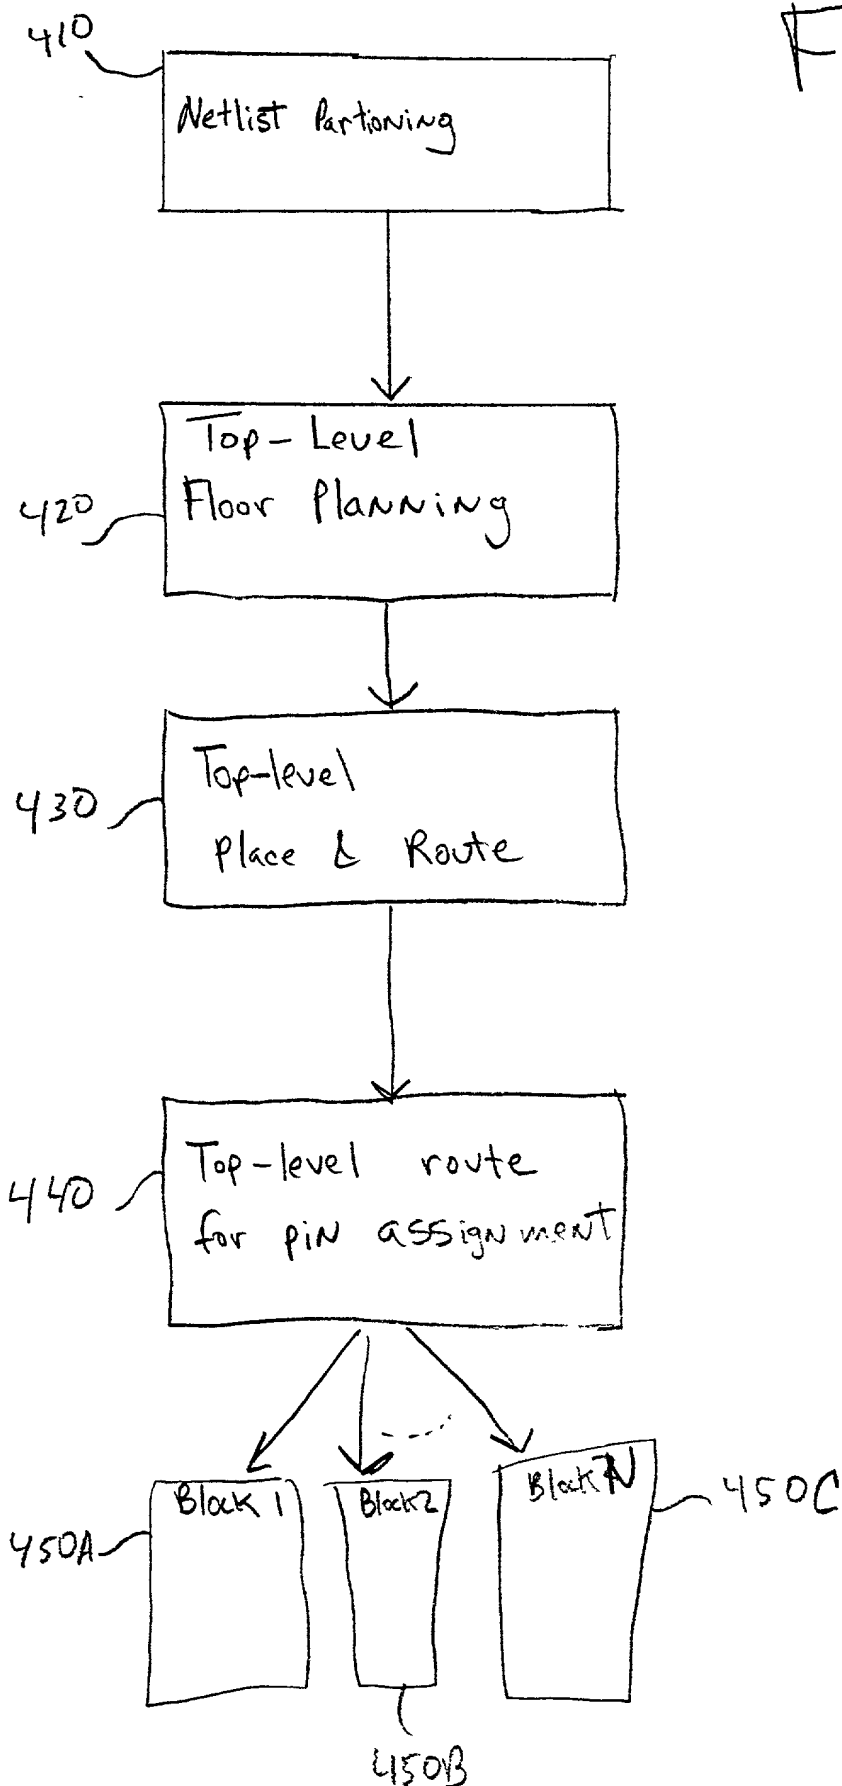

510

520

530

540

550

552

554

560

570

DRC

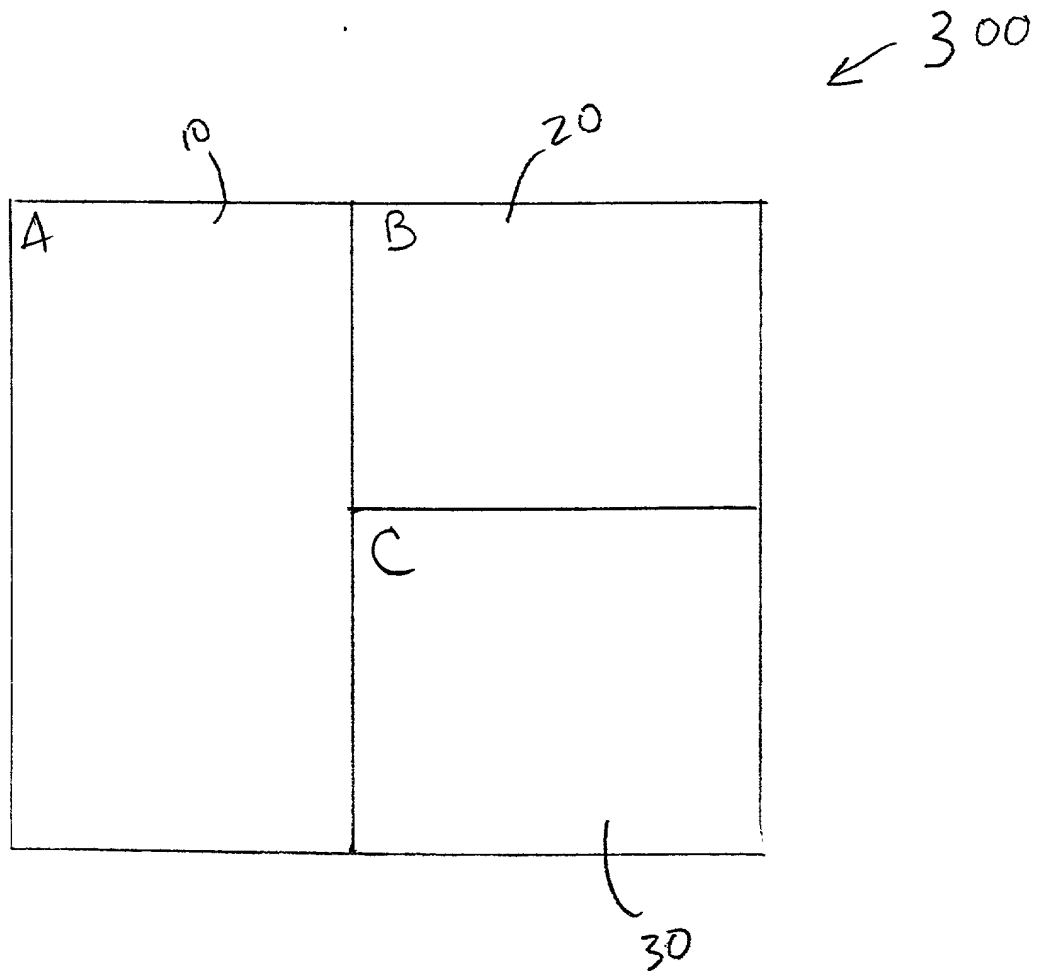


Figure 6

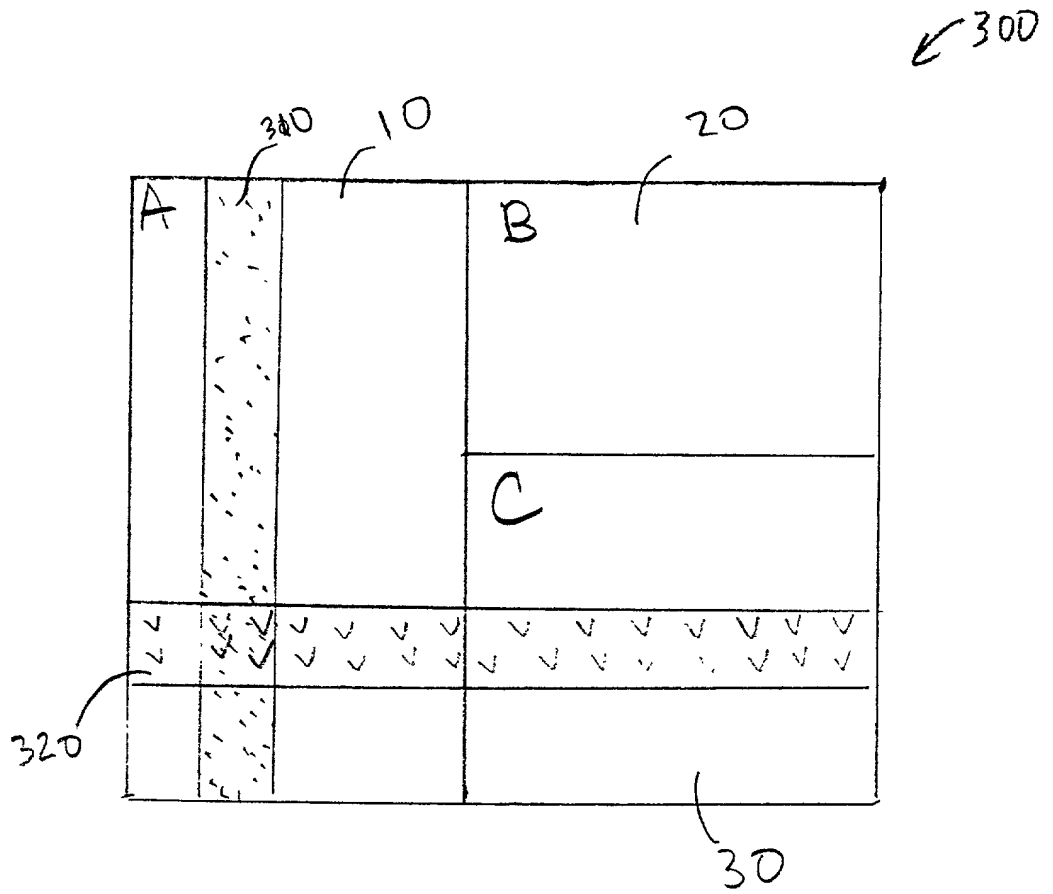


Figure 7

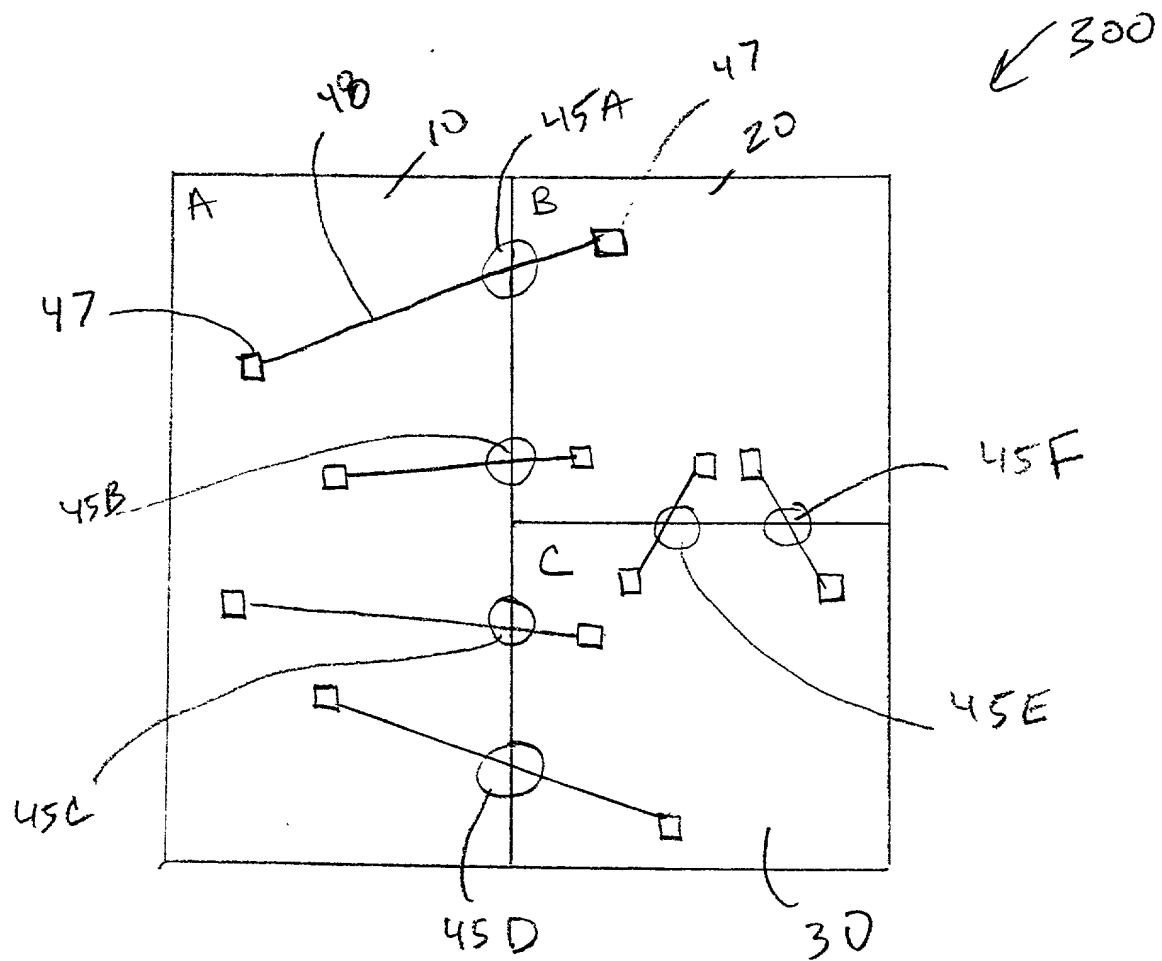


Figure 8

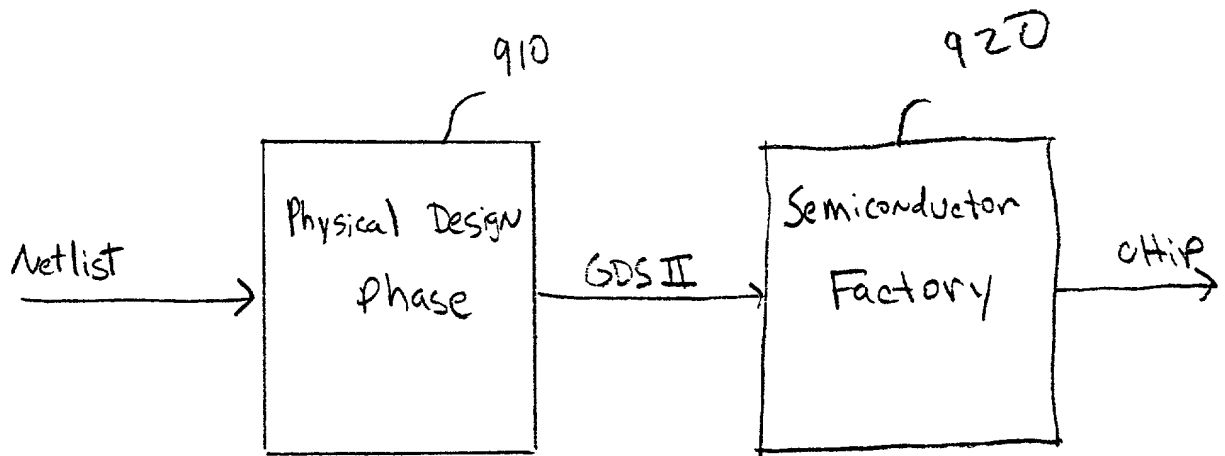


Figure 9A (Prior Art)

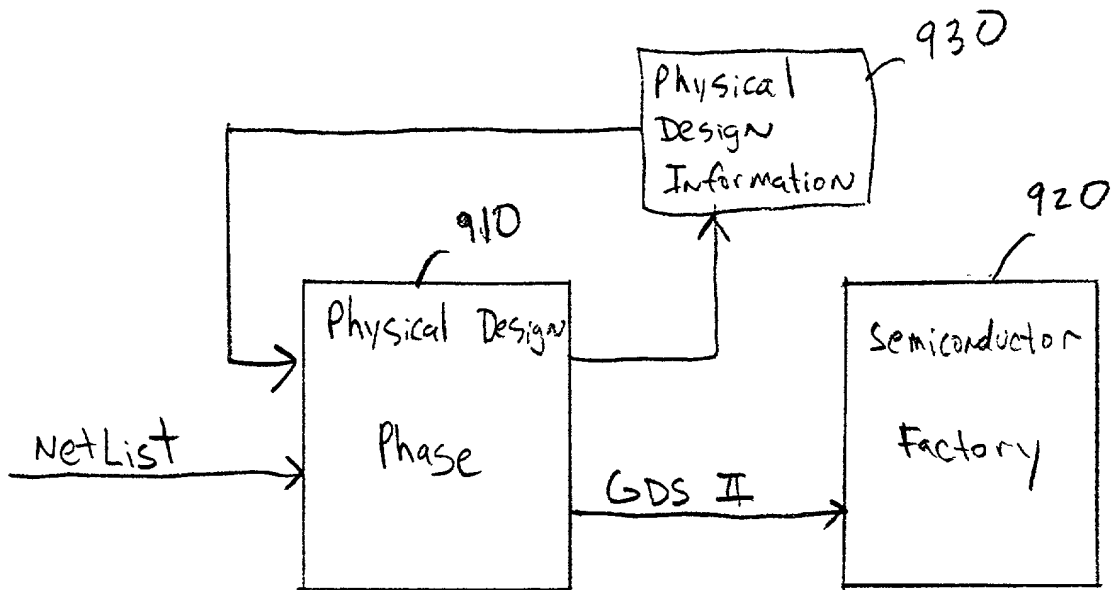
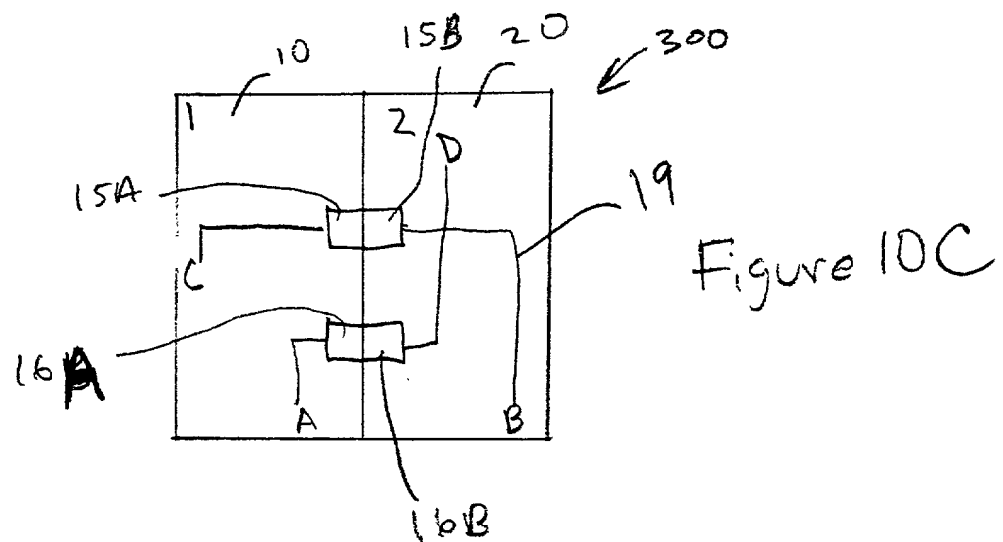
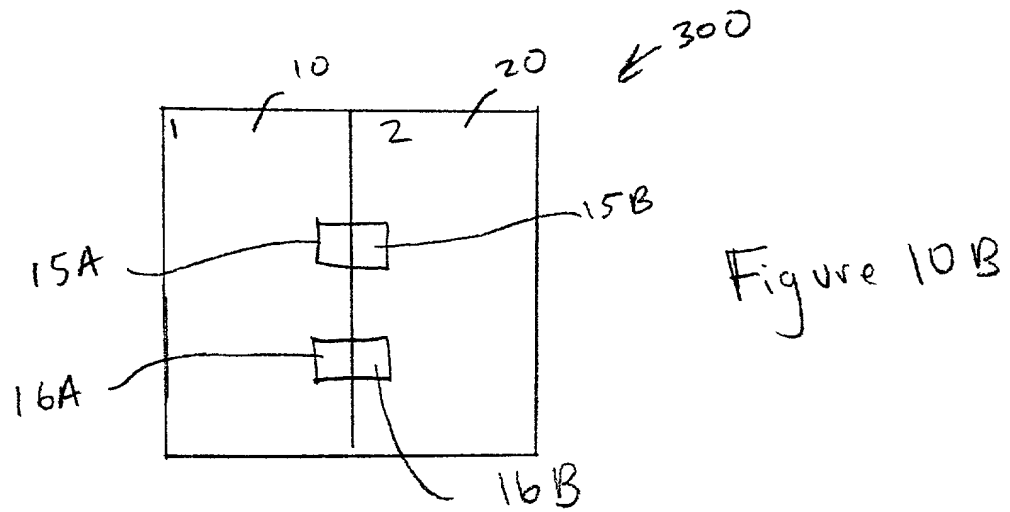
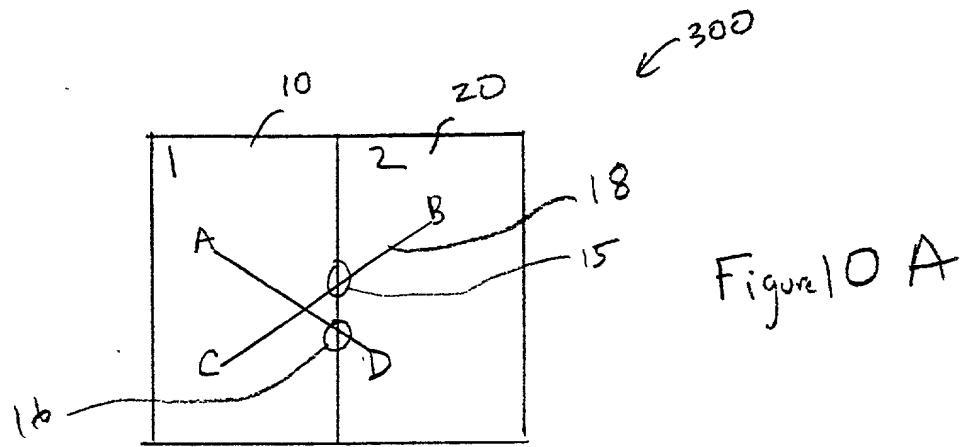


Figure 9B





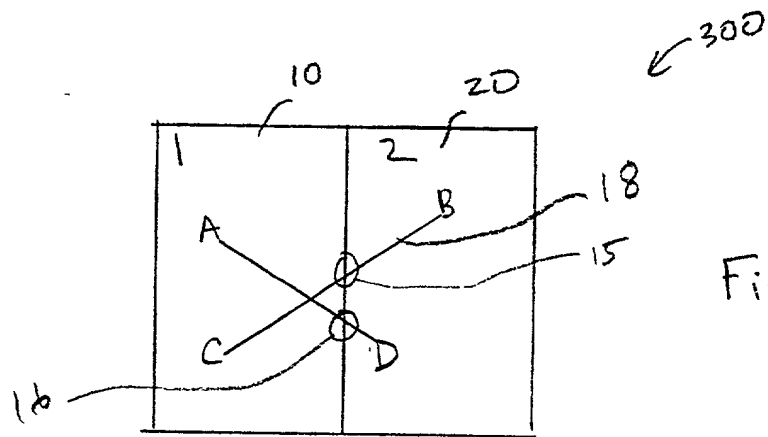


Figure 10A

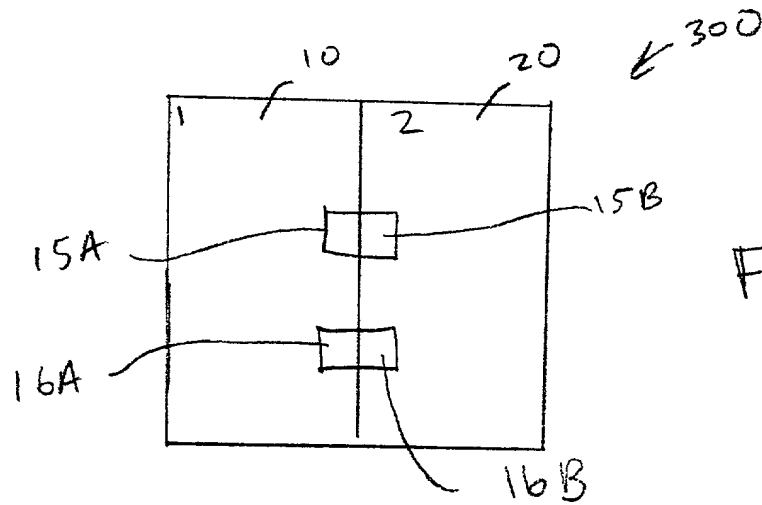


Figure 10B

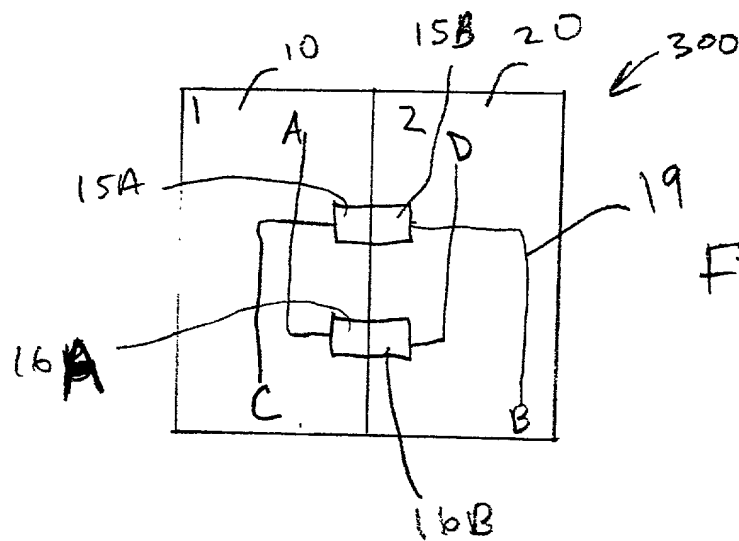


Figure 10C

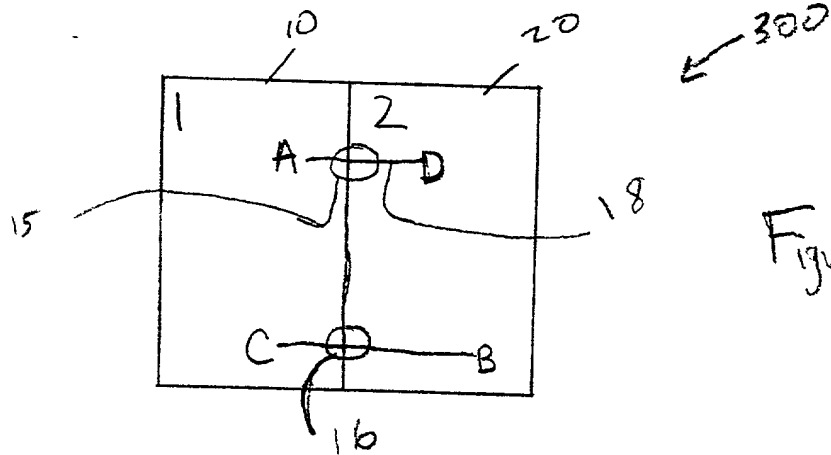


Figure 11A

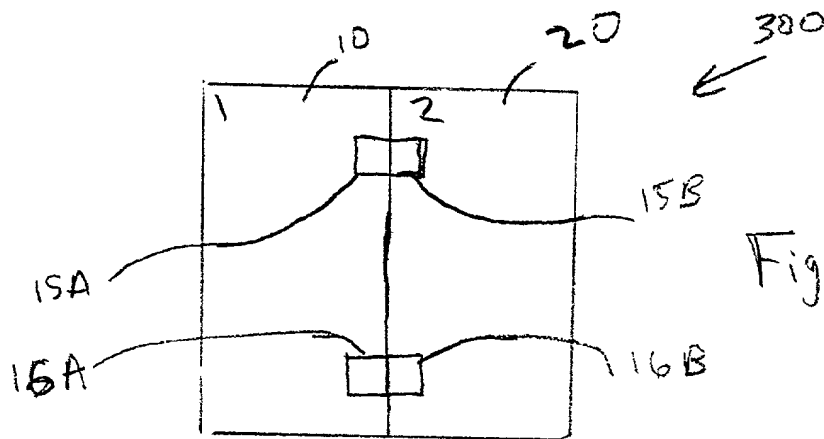


Figure 11B

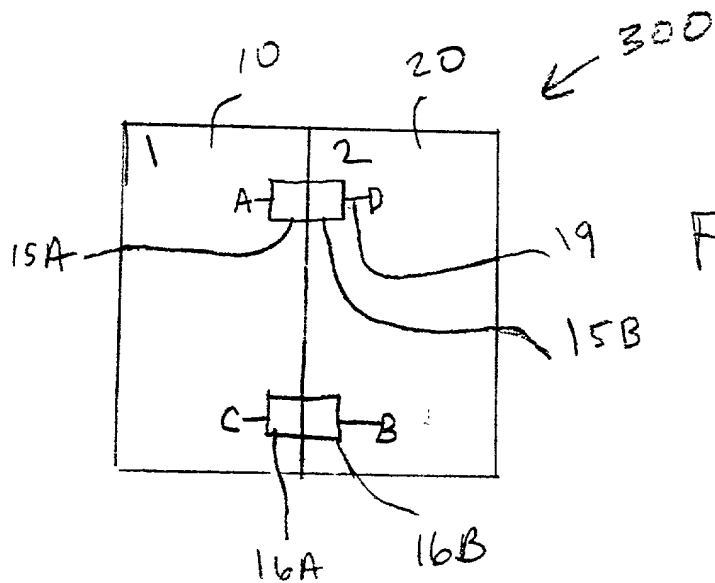


Figure 11C

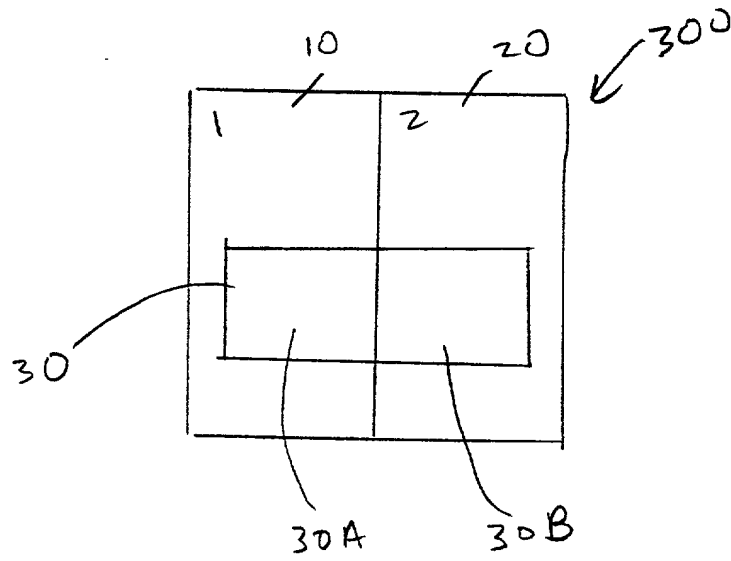


Figure 13A




Figure 13B

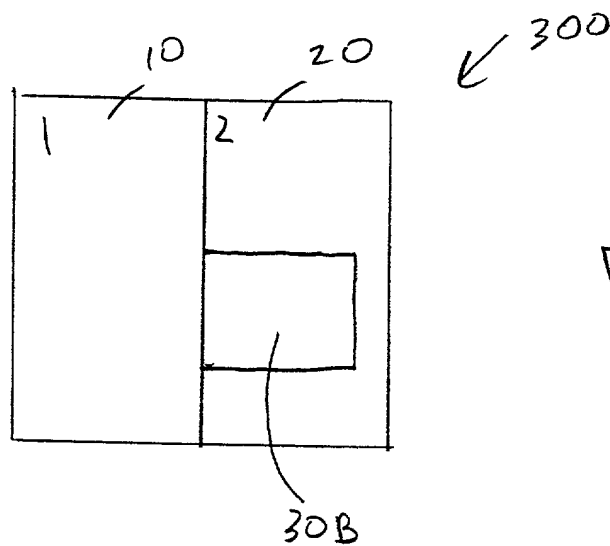


Figure 13C

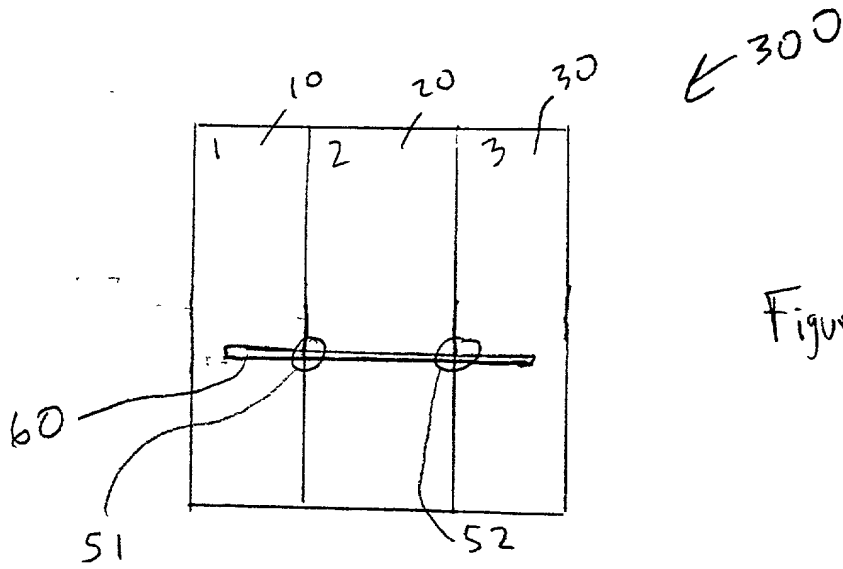


Figure 14A

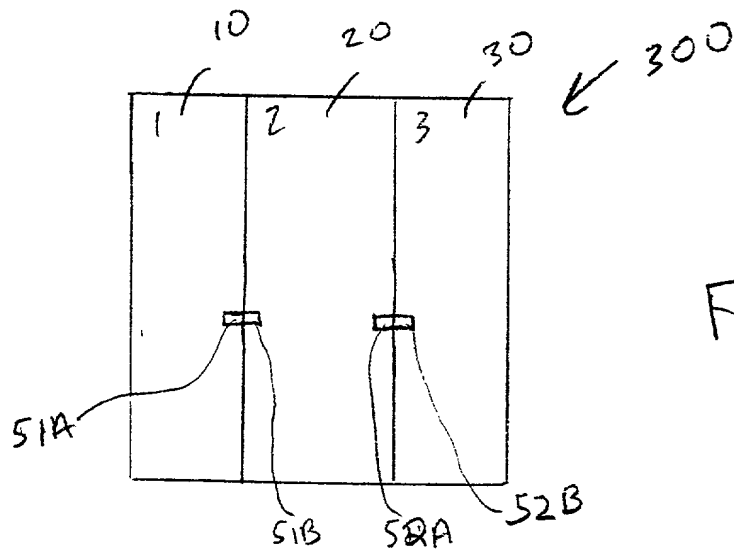


Figure 14B

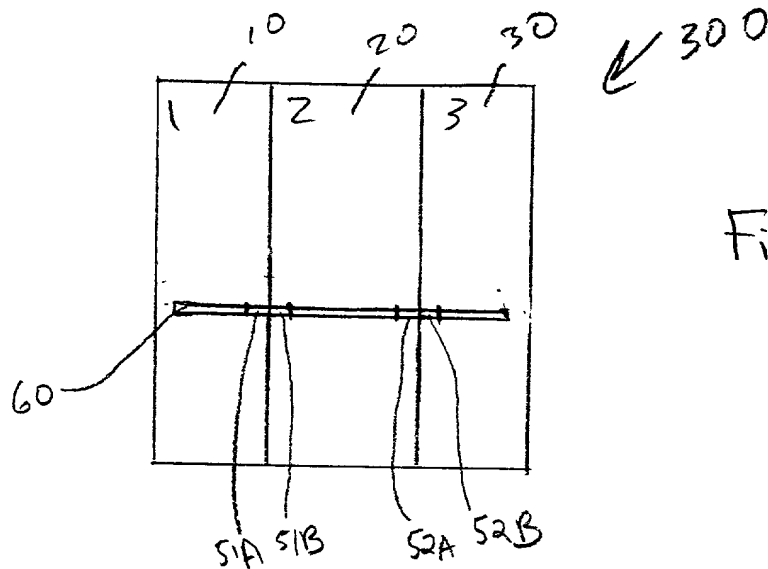


Figure 14C

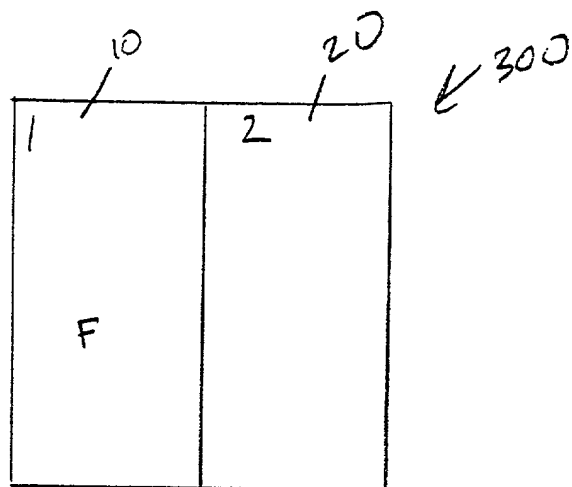


Figure 15 A

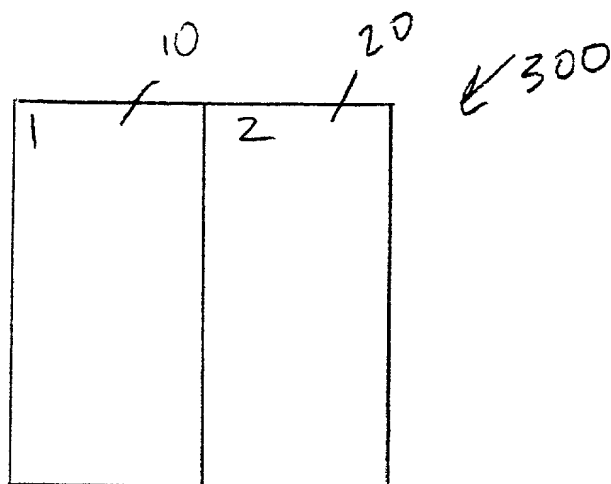


Figure 15 B

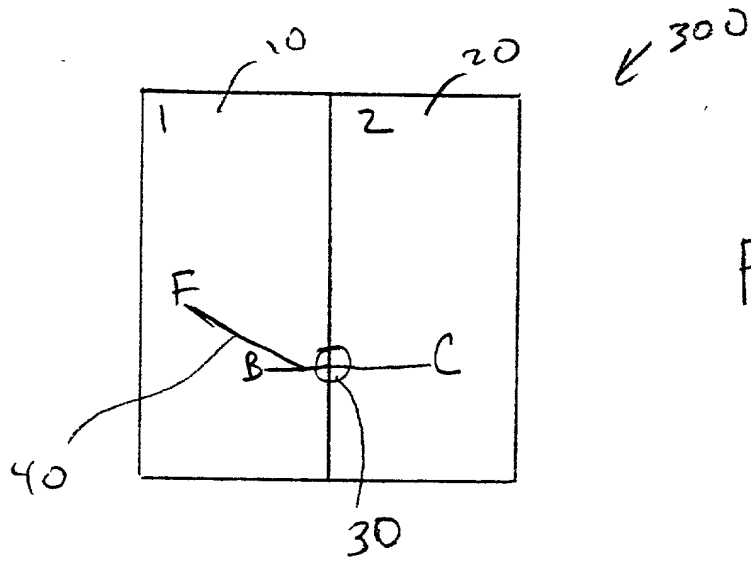


Figure 16A



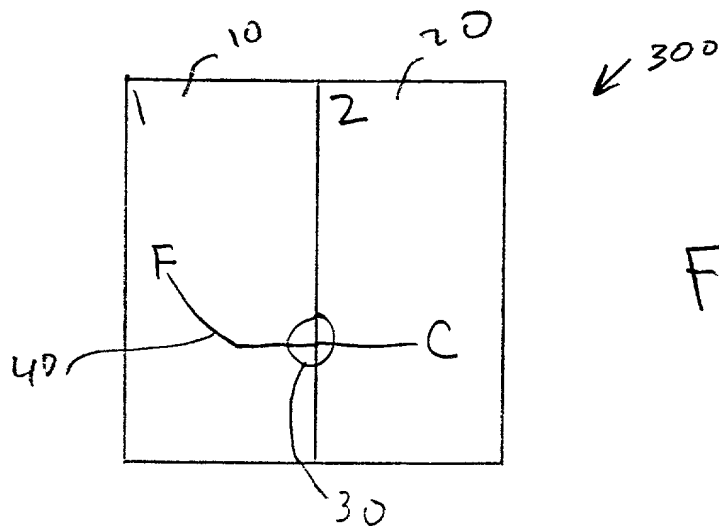


Figure 16 B

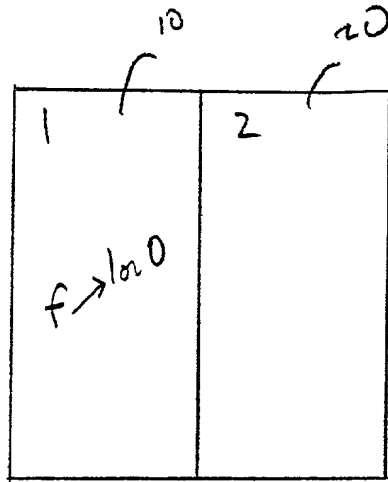

300

Figure 17A

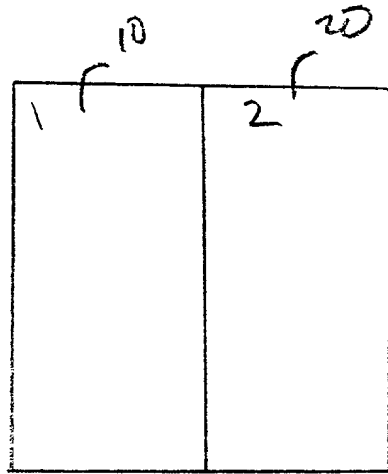

300

Figure 17B



## Declaration and Power of Attorney for a Patent Application

### Declaration

As below named inventor, I hereby declare that my residence post office address, and citizenship are as stated below my name. Further, I hereby declare that I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

OPTIMIZATION OF ABUTTED-PIN HIERARCHICAL PHYSICAL DESIGN

the specification of which:

☒ is attached hereto, or  
 ..... was filed on ..... as application serial no. .... : and  
 ..... was amended on .....

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above; and

I acknowledge the duty to disclose information which is material to the examination of this application in accordance with Title 37, Code of Federal Regulations, Section 1.56(a).

### Foreign Priority Claim

I hereby claim foreign priority benefits under Title 35, United States Code Section 119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

Number	Country	Date Filed	Priority Claimed
.....	.....	.....	..... yes ..... no
.....	.....	.....	..... yes ..... no

### U.S. Priority Claim

I hereby claim the benefit under Title 35, United States Code, Section 120 and 199(e) of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, Section 112, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, Section 1.56(a) which occurred between the filing date of the prior application and the national or PCT international filing date of this application:

Serial Number	Filing Date	Status (patented/pending/abandoned)
.....	.....	.....
.....	.....	.....

## Power of Attorney

As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent Trademark Office connected therewith.

James P. Hao	Registration No.: 36,398
Anthony C. Murabito	Registration No.: 35,295
John P. Wagner	Registration No.: 35,398
Glenn D. Barnes	Registration No.: 42,293
Rick G. Brewster	Registration No.: 35,077
Thomas M. Catale	Registration No.: 46,434
Jose S. Garcia	Registration No.: 43,628
Kenneth N. Glass	Registration No.: 42,587
Lin C. Hsu	Registration No.: 46,315
Patrick W. Ma	Registration No.: 44,215
Ronald M. Pomerence	Registration No.: 43,009
John F. Ryan	Registration No.: 47,050
William A. Zarbis	Registration No.: 46,120
Matthew J. Blecher	Registration No.: 46,558
Lawrence R. Goerke	Registration No.: 45,927

Send Correspondence to:

**WAGNER, MURABITO & HAO LLP**  
Two North Market Street  
Third Floor  
San Jose, California 95113  
(408) 938-9060

## Signatures

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full Name of Sole/First Inventor: Pete Dahl

Inventor's Signature \_\_\_\_\_ Date \_\_\_\_\_  
Residence \_\_\_\_\_ Citizenship \_\_\_\_\_  
(City State)

P.O. Address \_\_\_\_\_

Full Name of Second/Joint Inventor: Byron Dickinson

Inventor's Signature \_\_\_\_\_ Date \_\_\_\_\_  
Residence \_\_\_\_\_ Citizenship \_\_\_\_\_  
(City State)

P.O. Address \_\_\_\_\_

Full Name of Third/Joint Inventor: Margie Levine

Inventor's Signature \_\_\_\_\_ Date \_\_\_\_\_

Residence \_\_\_\_\_ Citizenship \_\_\_\_\_  
(City State)

P.O. Address \_\_\_\_\_

Full Name of Fourth/Joint Inventor: Paul Rodman

Inventor's Signature \_\_\_\_\_ Date \_\_\_\_\_

Residence \_\_\_\_\_ Citizenship \_\_\_\_\_  
(City State)

P.O. Address \_\_\_\_\_